

woodturning lathe  
t 124




# *Total Safety Machining.*

Distance between centers	t 124
Centers height	mm 1150
4 spindle speeds (at 50 Hz)	mm 200
Three-phase motor	rpm 570 / 1000 / 1850 / 2500
	kW/Hz 1,5 (1,8) / 50 (60)

*Find the complete technical specification at page 117*



**Structure**  
precision and safety



**Optional Devices**  
versatile and complete

Woodturning lathe, for demanding DIY woodworkers and craftsmen, fast, cost-effective, easy-to-use, reliable.

# woodturning lathe operating groups and optional devices

versatile and complete

## Optional Devices.

Full range of devices to realize your creativeness.

precision and safety


## Structure.

Maximum reliability and top precision, with its strong base, and total safety for the operator, thanks to the transparent guard.



### Copier.

Enables copying work at diameters greater or smaller than the template or pattern, feed by hand-wheel.

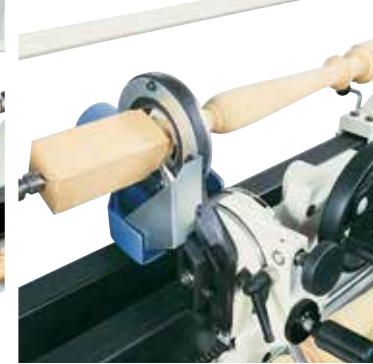

**Mobile Steady Rest**, with pre-cutting tool to guarantee perfect finishing.



**Fixed Steady Rest**, Reduces vibrations when turning long, thin components. The 'C' shape enables turning with hand tools.



**Face Plate** 300 mm diameter, ideal for large bowls.



**Cup or Screw Type Drive Benders:** 40 mm diameter cup centre and 70 mm screw centre made from a single-piece of stainless steel. Necessary for turning small cups and bowls.



**A) Sanding Unit**, complete with adjustable angle work surface, guide and sanding disc.




A



B

**B) Four-jaw Chuck** 125 mm diameter, for the rapid clamping of squared or circular components.

# woodturning lathe dimensions and technical data

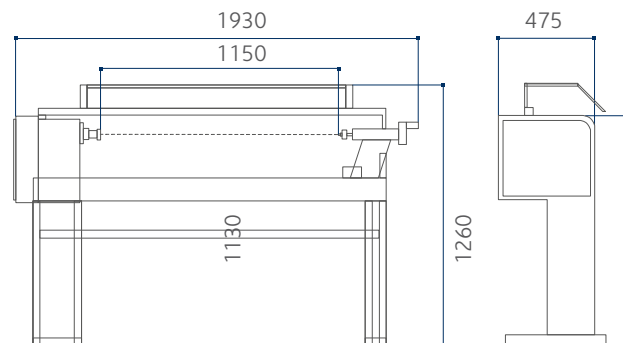

S Standard  
O Option

		t 124
Distance between centres	mm	1150
Centres height	mm	200
4 chuck speed (at 50 Hz)	rpm	570 / 1000 / 1850 / 2500
Tape drive with morse taper	n.	2
Ball bearing centre with morse taper	n.	2
Face plate diameter	mm	130
<b>Machine equipped with copying device (optional)...</b>		
Max. working length	mm	1120
Max. diameter	mm	200
<b>...and equipped with mobile rest (option):</b>		
Max. working length	mm	1070
Max. diameter	mm	80
Three-phase motor 1,5kW (2hp) 50 Hz - 1,8 kW (2,5 hp) 60 Hz		S
Single-phase motor 1,5kW (2hp) 50 Hz		O